




IMACS 8540-1800 Series

Digital output modules are used for controlling switching DC loads such as relays, solenoids, motor starters, lamps, ect.

Each module provides up to 4000 V_{RMS} of optical isolation between the field devices and control logic.


FEATURES

- LED status indicator
- Removable fuse
- 8540-1860 current rating
3 A @ 45°C
2 A @ 70°C
One sec surge of 5
- A8540-1861 current rating
1 A @ 45°C
0.55 A @ 70°C
One sec surge of 5 A
- 4000 V_{RMS} optical isolation
- -30 to 70°C operating temperature
- UL recognized
- CSA certified
- CE mark
- Passes NEMA showering arc test [ICS 2-230]
- Meets IEEE surge withstand specification [IEEE-472]



DIGITAL DC OUTPUT MODULES

5 to 60 VDC 8540-1860 G4 ODC5
5 to 200 VDC 8540-1861 G4 ODC5A

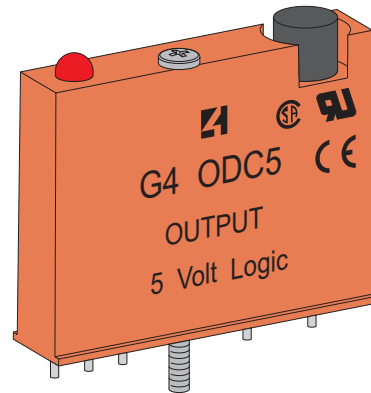

PRIME MOVER CONTROLS INC.

3600 GILMORE WAY, BURNABY B.C. CANADA V5G 4R8
TEL (604) 433-4644 FAX (604) 433-5570 email: info@pmc-controls.com